




Perimeter Detection Systems

G-WALL


Wall-mounted Shock Detection Cable

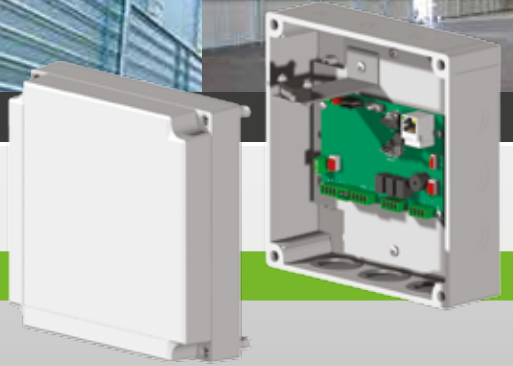

Detection Reliability

G-Wall is a wall-mounted shock detection cable that detects hammering, cutting and ram-raiding intrusion attempts on a wide range of different surfaces including concrete, brick and metal-sheet cladding.

G-Wall is designed to protect warehouses and commercial buildings and will detect an intrusion attempt before entry inside the building that is under protection.

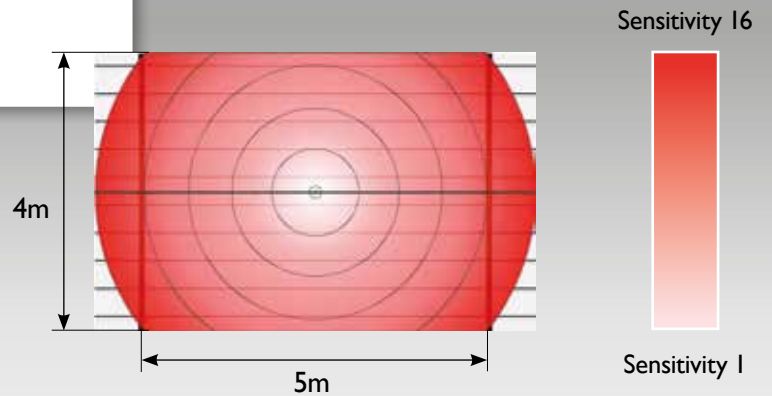

The detection zone rises with the sensitivity

Easy Installation and Modularity


G-Wall is composed of a Control Unit that can manage up to 600m of detection cable and 2 zones of detection (1 per direction).

Sensors using the accelerometer technology are pre-cabled along the detector cable and provide a detection range of 5m in height and 5m in width. Each sensor can have it's own sensitivity setting to allow for greater flexibility when there are different surfaces within the same building.

Automatic calibration of the sensors allows for rapid installation and the sensitivity can be adjusted on a scale from 1-16 according to the requirements of the site. The sensors are fixed directly onto the wall every 5m using brackets.

Maintenance and Configuration at Distance

Maintenance and configuration of the sensitivity settings at distance is possible thanks to the integrated web server of the Control Unit. It is possible to have real time access to the control inputs and outputs as well as the last 1000 events.

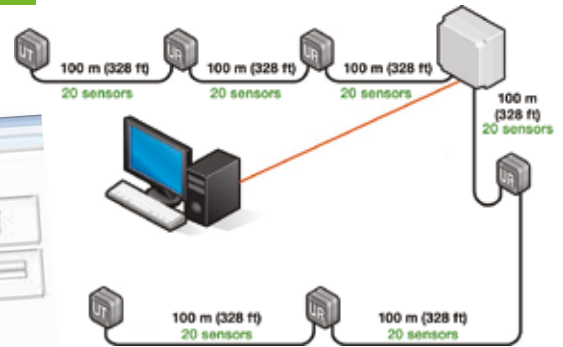

Technical Specification

Power supply	12V DC
Alarm information	Intrusion (per cable) Technical default (cable cut, power default) Tamper protection
Operating temperature	From - 35°C up to +70°C
System specification	600m of detection divided into 6 cables of 100m 1 Control Unit per system 20 sensors per 100m cable
Relay outputs	3

Seal of the retailer

In order to continuously ensure the high standard of quality and performance of our products, we reserve the right to modify the present technical data without notification.



Protection Technologies, Inc. - 529 Vista Blvd
Sparks, NV 89434 - USA - Toll Free: 1-800-428-9662
Phone: (775) 856-7333 - Fax: (775) 856-7658 - E-mail: sales@protechusa.com

www.protechusa.com